

New!



ETS MAX 4A

2 Bar

The ETS MAX 4A is built for indoor cultivators who want to get high levels of light on their plants and don't want to worry about photobleaching. Created with a 48% red spectrum and replaceable bars, the 4A is available in 3 power levels and 2-bar and 3-bar configurations.


3 Power Levels

Full Power	87% Power	65% Power
PPF: 2,215	PPF: 1,980	PPF: 1,540
PPE: 2.75	PPE: 2.82	PPE: 2.93

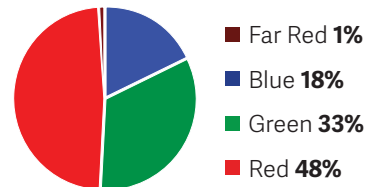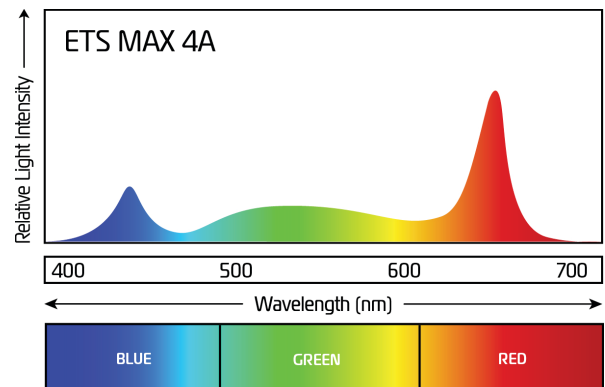


Cost Effective

Excellent light output per dollar




Low Red %

48% red spectrum reduces photobleaching



50% More Light

Higher output compared to a 1000W HPS light



Thermal Management

Optimized heat management for longevity

4A Spectrum, 2 Bar Array					
Metric		ETS MaxP-4A Single Bar DC Powered Full Power	ETS Max 800P-480-4A-2 bar array		
			Full Power (800W)	700W	520W
Optical	Photosynthetic Photon Flux: PPF (μmol/s)	1107	2215	1980	1540
	Photosynthetic Photon Efficacy: PPE (μmol/Joule)	2.92			
	Efficacy - AC derated PPE (μmol/Joule) (worst case 277/480V)		2.75	2.82	2.93
DC	DC Input voltage	53.2			
	DC current (A):	7.1			
	DC Power (W):	378			
AC & Driver	AC Voltage & Frequency: (VAC)		200-480 50/60Hz		
	AC Derated Power - Typical (W)		800		
	AC Current (typ) - 277 V		2.97		
	AC Current (typ) - 480 V		1.82		
	Power Factor (worst case @ 480V)		.915		
	Total Harmonic Distortion (%) (worst case @ 480V)		17.5		
	Driver Lifetime		> 50,000 hrs		
	Maximum Ambient Temperature		40 deg C		

Light Type	Controlled Environment	Indoor stacked, Indoor Non-stacked, and Greenhouse
	Lighting Scheme	Top Light
	Use Case	Sole-source and Supplemental
Dimming	Type	0-10V IEC, Dim to Off
	Connector	M12 Connector, Waterproof
Safety & Certifications	UL8800	Certified
	Design Lights Consortium	Certified
Lifetime	Photon Flux Maintenance L90	>50,000 Hours
	Warranty	5 Year Parts and Labor

Metric	Weight
3 Bar Array	5.4 lbs
Driver	6.5 lbs

