


New!

# ETS MAX 4C

## 2 Bar

The ETS MAX 4C is a cost-effective light designed to operate at a high light intensity while helping to alleviate photobleaching risk. With a low red spectrum (41% red), and high output, it's perfect for cultivators looking to maximize yield and minimize photobleached flower. Cultivators can replace their 1000W HPS lights with the ETS MAX 4C 1000W lights and get 50% more light on their plants without increasing power consumption.

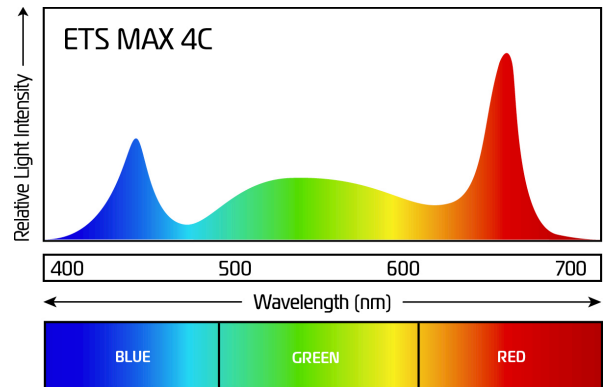


### 3 Power Levels

Full Power  
PPF: 1,800  
PPE: 2.62

87% Power  
PPF: 1,620  
PPE: 2.70

65% Power  
PPF: 1,250  
PPE: 2.80

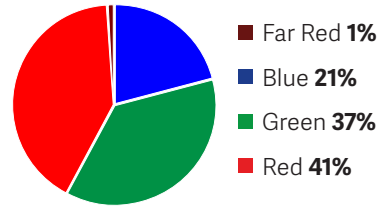

**Cost Effective**  
Excellent light output per dollar



**Low Red %**  
41% red spectrum reduces photobleaching



**50% More Light**  
Higher output compared to a 1000W HPS light



**Thermal Management**  
Optimized heat management for longevity

## 4C Spectrum, 2 Bar Array

Metric		ETS MaxP-4C Single Bar DC Powered Full Power	ETS Max 700P-480-4C-2 Bar Array		
			Full Power (688W)	600W	500W
Optical	Photosynthetic Photon Flux: PPF (μmol/s)	900	1800	1620	1400
	Photosynthetic Photon Efficacy: PPE (μmol/Joule)	2.80			
	Efficacy - AC derated PPE (μmol/Joule) (worst case 277/480V)		2.62	2.70	2.79
DC	DC Input voltage	42.0			
	DC current (A):	7.66			
	DC Power (W):	322			
AC & Driver	AC Voltage & Frequency: (VAC)		200-480 VAC 50/60Hz		
	AC Derated Power - Typical (W)		688		
	AC Current (typ) - 277 V		2.55		
	AC Current (typ) - 480 V		1.60		
	Power Factor (worst case @ 480V)		.903		
	Total Harmonic Distortion (%) (worst case @ 480V)		18.6		
	Driver Lifetime			>50,000 hrs	
	Maximum Ambient Temperature		40 deg C		

Light Type	Controlled Environment	Indoor stacked, Indoor Non-stacked, and Greenhouse
	Lighting Scheme	Top Light
	Use Case	Sole-source and Supplemental
Dimming	Type	0-10V IEC, Dim to Off
	Connector	M12 Connector, Waterproof
Safety & Certifications	UL8800	Certified
	Design Lights Consortium	Certified
Lifetime	Photon Flux Maintenance L90	>50,000 Hours
	Warranty	5 Year Parts and Labor

Metric	Weight
3 Bar Array	5.4 lbs
Driver	6.5 lbs

**Flexible Mounting Hooks or Wires**  
Multiple configurations for easy setup and installation

**ETS MAX Technology**  
Delivers a bright, durable, lightweight fixture with customizable power and fall pattern options

**41% Red Spectrum**  
Industry-leading efficiency with up to 2.74 DC PPE

**Superior LED Diodes**  
Produces double the light output compared to HPS lights for the same power

**Lightweight Design**  
Reduces strain on facility infrastructure and decreases installation time

