


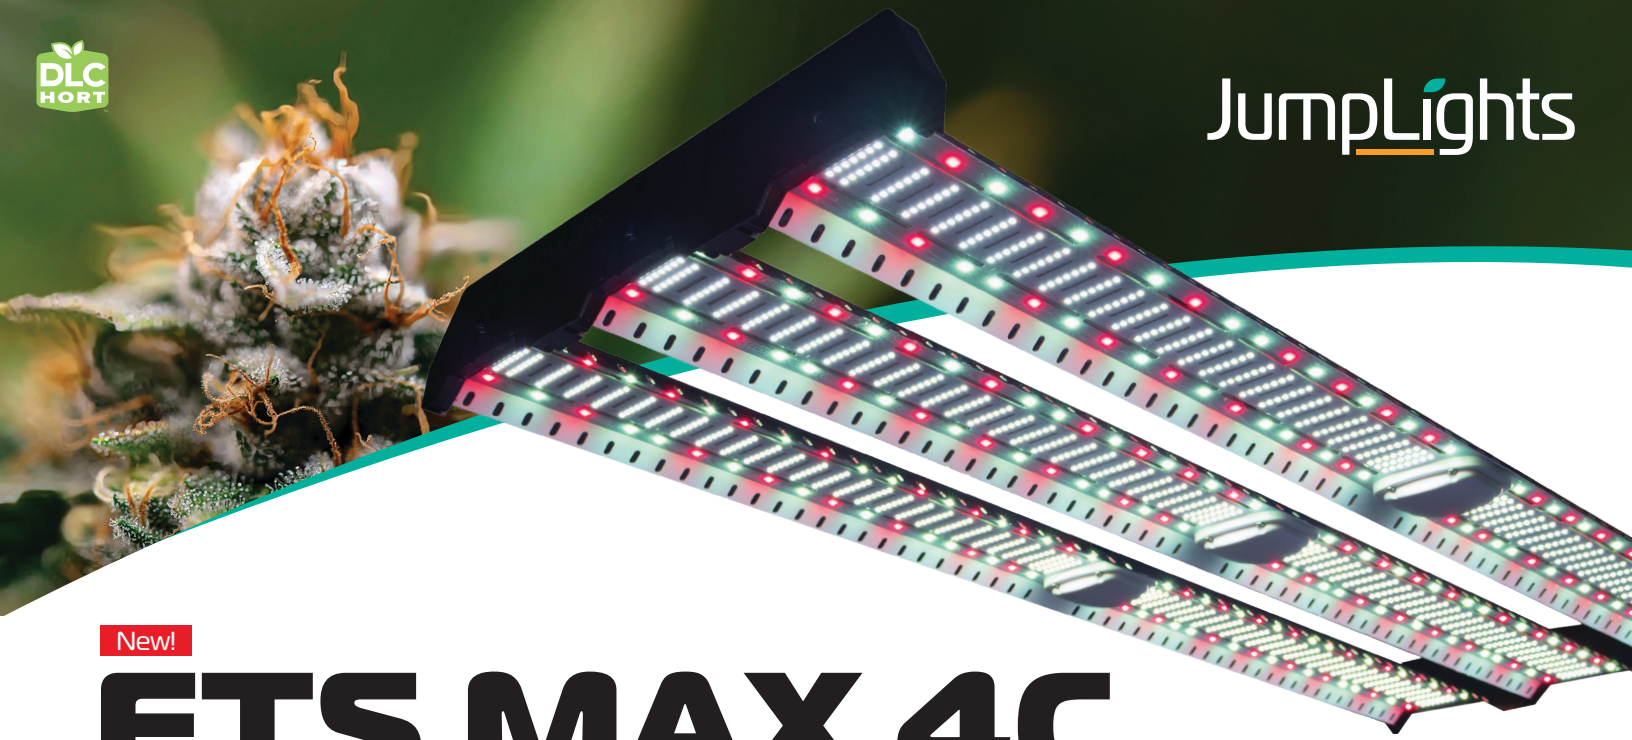


New!

ETS MAX 4C

3 Bar

The ETS MAX 4C is a cost-effective light designed to operate at a high light intensity while helping to alleviate photobleaching risk. With a low red spectrum (41% red), and high output, it's perfect for cultivators looking to maximize yield and minimize photobleached flower. Cultivators can replace their 1000W HPS lights with the ETS MAX 4C 1000W lights and get 50% more light on their plants without increasing power consumption.

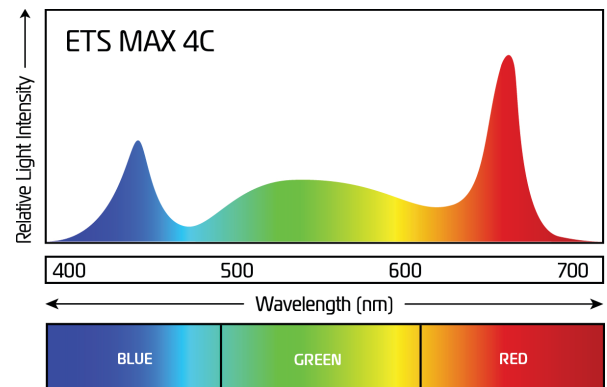


3 Power Levels

Full Power
PPF: 2,700
PPE: 2.57

87% Power
PPF: 2,380
PPE: 2.65

65% Power
PPF: 1,880
PPE: 2.76

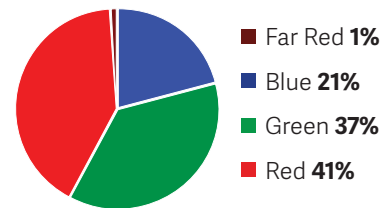

Cost Effective

Excellent light output per dollar



Low Red %

41% red spectrum reduces photobleaching



50% More Light

Higher output compared to a 1000W HPS light



Thermal Management

Optimized heat management for longevity

4C Spectrum, 3 Bar Array					
Metric		ETS MaxP-4C Single Bar DC Powered Full Power	ETS Max 1050P-480-4C-3 bar array		
			Full Power (1050W)	900W	680W
Optical	Photosynthetic Photon Flux: PPF (µmol/s)	900	2700	2380	1880
	Photosynthetic Photon Efficacy: PPE (µmol/Joule)	2.80			
	Efficacy - AC derated PPE (µmol/Joule) (worst case 277/480V)		2.57	2.65	2.76
DC	DC Input voltage	42.0			
	DC current (A):	7.66			
	DC Power (W):	322			
AC & Driver	AC Voltage & Frequency: (VAC)		200-480 VAC 50/60 Hz		
	AC Derated Power - Typical (W)		1050		
	AC Current (typ) - 277 V		3.87		
	AC Current (typ) - 480 V		2.34		
	Power Factor (worst case @ 480V)		.938		
	Total Harmonic Distortion (%) (worst case @ 480V)		14.2		
	Driver Lifetime		>50,000 hrs		
	Maximum Ambient Temperature		40 deg C		

Light Type	Controlled Environment	Indoor stacked, Indoor Non-stacked, and Greenhouse
	Lighting Scheme	Top Light
	Use Case	Sole-source and Supplemental
Dimming	Type	0-10V IEC, Dim to Off
	Connector	M12 Connector, Waterproof
Safety & Certifications	UL8800	Certified
	Design Lights Consortium	Certified
Lifetime	Photon Flux Maintenance L90	>50,000 Hours
	Warranty	5 Year Parts and Labor

Metric	Weight
3 Bar Array	7.4 lbs
Driver	8 lbs

Flexible Mounting Hooks or Wires
Multiple configurations for easy setup and installation

ETS MAX Technology
Delivers a bright, durable, lightweight fixture with customizable power and fall pattern options

41% Red Spectrum
Industry-leading efficiency with up to 2.74 DC PPE

Superior LED Diodes
Produces double the light output compared to HPS lights for the same power

Lightweight Design
Reduces strain on facility infrastructure and decreases installation time

